


絶縁歐式端子

Cord-End sleeves (DIN-46228/4)

(Insulation : Polyamid 66, -50°C) (Material : Copper tube, Tin plated)

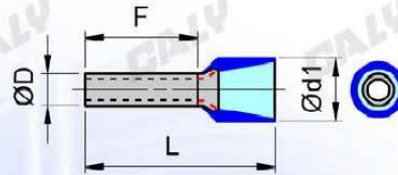

Unit:mm

| ITEM NO. | WIRE RANGE mm ² AWG | L unit : mm | F unit : mm | φ D | φ d1 | (T) French | Color Systems | |
|------------|--------------------------------------|----------------|----------------|------|------|---------------|---------------|------------|
| | | | | | | | (W) German | (D) DIN |
| CE 0.25-6 | 0.25 | 10 | 6 | 1.05 | 2.5 | ● Violet | ● l.blue | |
| CE 0.25-8 | 26 | 12 | 8 | | | | | |
| CE 0.34-6 | 0.34 | 10 | 6 | 1.10 | 2.5 | ● pink | ● turkis | |
| CE 0.34-8 | 24 | 12 | 8 | | | | | |
| CE 0.5-6 | | 12 | 6 | | | | | |
| CE 0.5-8 | 0.50 | 14 | 8 | 1.30 | 3.2 | ○ white | ● orange | ○ white |
| CE 0.5-10 | 22 | 16 | 10 | | | | | |
| CE 0.75-6 | | 12 | 6 | | | | | |
| CE 0.75-8 | 0.75 | 14 | 8 | 1.50 | 3.4 | ● m.blue | ○ white | ● grey |
| CE 0.75-10 | 20 | 16 | 10 | | | | | |
| CE 0.75-12 | | 18 | 12 | | | | | |
| CE 1.0-6 | | 12 | 6 | | | | | |
| CE 1.0-8 | 1.00 | 14 | 8 | 1.70 | 3.6 | ● red | ● yellow | ● red |
| CE 1.0-10 | 18 | 16 | 10 | | | | | |
| CE 1.0-12 | | 18 | 12 | | | | | |
| CE 1.5-6 | | 12 | 6 | | | | | |
| CE 1.5-8 | | 14 | 8 | | | | | |
| CE 1.5-10 | 1.50 | 16 | 10 | 2.00 | 4.1 | ● black | ● d.red | ● black |
| CE 1.5-12 | 16 | 18 | 12 | | | | | |
| CE 1.5-18 | | 24 | 18 | | | | | |
| CE 2.5-8 | | 14 | 8 | | | | | |
| CE 2.5-10 | 2.50 | 16 | 10 | 2.50 | 4.8 | ● grey | ● blue | ● blue |
| CE 2.5-12 | 14 | 18 | 12 | | | | | |
| CE 2.5-18 | | 24 | 18 | | | | | |
| CE 4-10 | | 17 | 10 | | | | | |
| CE 4-12 | 4.00 | 20 | 12 | 3.20 | 5.5 | ● orange | ● grey | ● grey |
| CE 4-18 | 12 | 26 | 18 | | | | | |
| CE 6-12 | 6.00 | 20 | 12 | 3.90 | 7.0 | ● green | ● black | ● yellow |
| CE 6-18 | 10 | 26 | 18 | | | | | |
| CE 10-12 | 10.00 | 22 | 12 | 4.90 | 8.4 | ● brown | ○ ivory | ● red |
| CE 10-18 | 8 | 28 | 18 | | | | | |
| CE 16-12 | 16.00 | 24 | 12 | 6.20 | 9.6 | ○ ivory | ● green | ● blue |
| CE 16-18 | 6 | 28 | 18 | | | | | |
| CE 25-16 | | 28 | 16 | | | | | |
| CE 25-18 | 25.00 | 30 | 18 | 7.70 | 12.0 | ● black | ● brown | ● yellow |
| CE 25-22 | 4 | 35 | 22 | | | | | |
| CE 35-16 | | 30 | 16 | | | | | |
| CE 35-18 | 35.00 | 32 | 18 | 8.70 | 13.5 | ● red | ● beige | ● red |
| CE 35-25 | 2 | 39 | 25 | | | | | |
| CE 50-20 | 50.00 | 36 | 20 | 10.9 | 16.0 | ● blue | ● olive | ● blue |
| CE 50-25 | 1/0 | 40 | 25 | | | | | |
| CE 70-21 | 70.00 | 37 | 21 | 14.3 | 17.2 | | | ● yellow |
| | 2/0 | | | | | | | |
| CE 95-25 | 95.00 | 44 | 25 | 15.5 | 19.2 | | | ● red |
| | 3/0 | | | | | | | |
| CE 120-27 | 120.00 | 48 | 27 | 17.6 | 21.4 | | | ● blue |
| | 4/0 | | | | | | | |
| CE 150-32 | 150.00 | 58 | 32 | 20.5 | 25.0 | | | ● yellow |

250-300MCM

★ Specifications for reference only; changing w/o prior notice.
 ★ Tri-rated system is available.